


E801

80mm Thermal Printer

- Elegant and fashionable appearance
- Alarm at paper release
- Japanese cutter, long lifetime



Dimensions

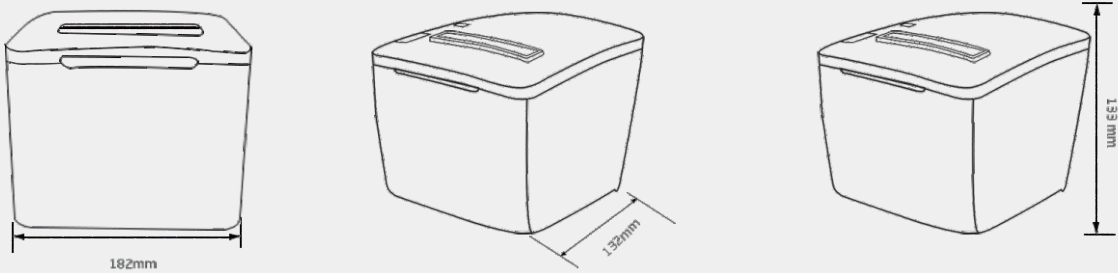

I/O Interfaces



- ① RJ11
- ② USB
- ③ Ethernet
- ④ COM
- ⑤ DC-in

E801 Data Sheet

Printer Ability	
Printing Method	Thermal Line Printing
Printing Density	8 dots/mm,576 dots/line
Printing Speed	Max :250mm/s
Effective Printing Width	72mm
Paper Width	80 mm±0.5mm

Printing Support	
Self-defining Character	Support
Graphic Printing	Support different density point map and download bitmap printing
Font Size	"ANK characters, Font A: 1.5×3.0mm (12×24pt) ; Font B: 1.1×2.1mm (9×17pt) 。 National standard three-level character bank: simplified or traditional: 3.0×3.0mm(24×24pt) "
Extended Functions	PC437、KataKana、PC850、PC860、PC863、PC865、WPC1251、PC866、MIK、PC755、Iran、Reserve、PC862、WPC1252、WPC1253、PC852、PC858、Iran II、Latvian、PC864、ISO-8859-1、PC737、WPC1257、Thai、PC720、PC855、PC857、WPC1250、PC775、WPC1254、WPC1255、WPC1256、WPC1258、ISO-8859-2、ISO-8859-3、ISO-8859-4、ISO-8859-5、ISO-8859-6、ISO-8859-7、ISO-8859-8、ISO-8859-9、ISO-8859-15、Thai2、PC856
Barcode 1D	UPC-A; UPC-E; EAN-13; EAN-8; CODE39; CODE93; CODABAR; ITF25; CODE128
Barcode 2D	PDF417; QRCODE; Data Matrix
Extended Functions	LAN, USB, COM, Bluetooth
Support Functions	Sound alarm, lack paper alarm, black label detection, over-heat protection, cutter wrong position detection, top cover not tight detection
Cash Drawer Control	DC24V, 1A, 6 wire RJ-11 plug

Power	
DC Power	DC24V±10%, 2A

Paper Specifications	
Paper Type	Thermal roll paper 80×Ø 80mm
Paper Thickness	0.06mm ~ 0.08mm
Loading Method	Simple to install
Cutting Method	Auto-cutting

Environmental	
Working	Temperature: 5 ~ 50°C, humidity: 10 ~ 80%
Storage	Temperature: -20 ~ 60°C, humidity: 10 ~ 90%

Lifetime	
Reliability	Movement reliability 150 km, cutter lifetime 1,000,000 times